




# G30B

Glass thickness: 10 - 17 mm, 25 - 38 mm

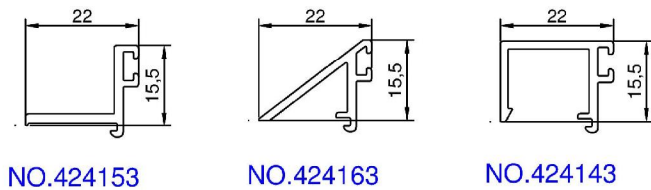


## GLAZING BEADS

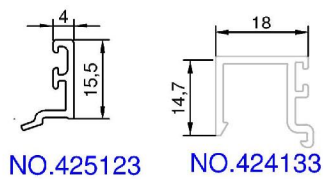

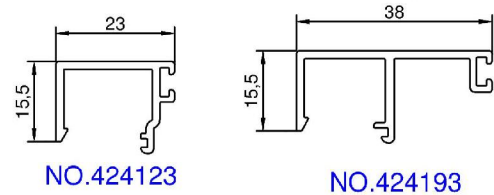




Glazing beads (no. 424143, 424153, 424163) can be used alternatively.




## EXTERNAL GASKETS

-  3mm  
NO.161171 (SMEARED)  
NO.161211
-  5mm  
NO.161181 (SMEARED)  
NO.161221
-  7mm  
NO.161191 (SMEARED)  
NO.161231

## INTERNAL GASKETS

-  7-8mm  
NO.162351
-  6mm  
NO.162341
-  5mm  
NO.160611 (SMEARED)
-  4mm  
NO.160661 (SMEARED)
-  3mm  
NO.160391 (SMEARED)



Hansen

Contens:

Possible thickness of glass in the system  
HansenMillennium® G30B  
fixed glass